



Available in Your Choice of Standard or Stainless Steel

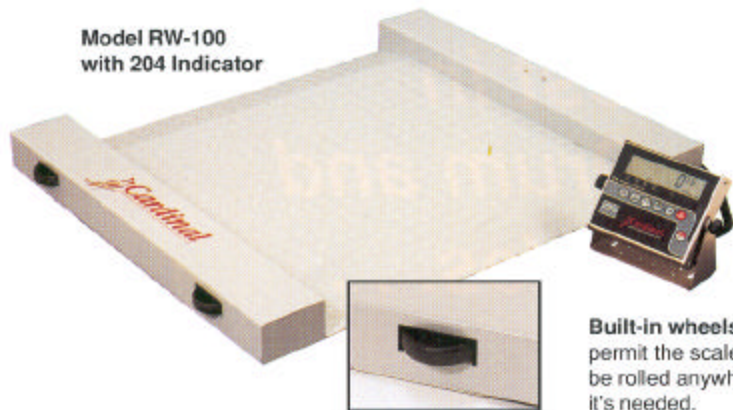

Model RW-100
with 204 Indicator

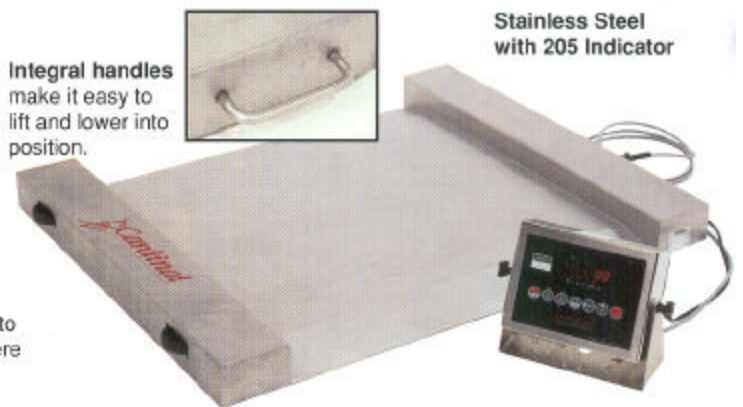


Stainless Steel
with 205 Indicator

Integral handles
make it easy to
lift and lower into
position.

Built-in wheels
permit the scale to
be rolled anywhere
it's needed.

Cardinal's "Run-A-Weigh" . . . So Portable You Can Use It *Anywhere and Everywhere!*

Designed for weighing "on-the-move," this portable scale features a Cardinal Digital Weight Indicator that can be mounted on the wall or desk for convenient viewing. Setup is simple and quick with the *Run-A-Weigh's* self-aligning feet. Heavy-duty construction, large checkered safety plate platform with integral ramps, and the 500 lb or 1,000 lb capacity make this the perfect scale for weighing barrels, drums, and small crates - *anywhere!*

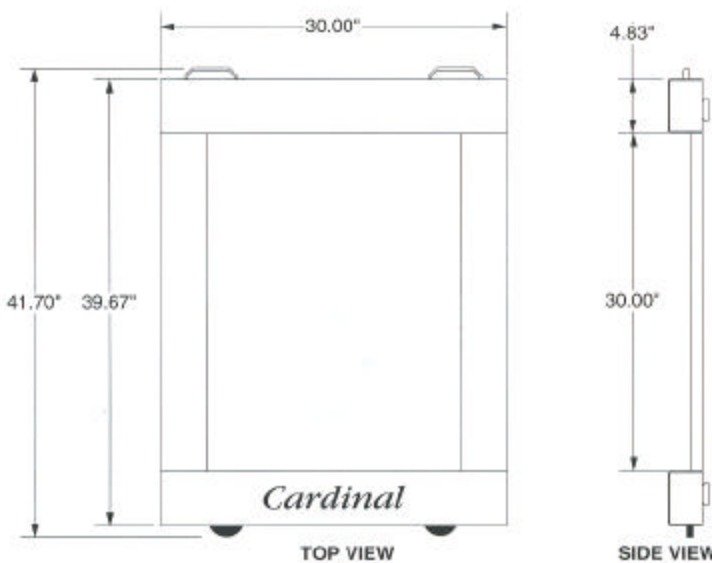

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice.

Specifications

Capacity:	RW-1000 1000 lb x 0.5 lb/450 kg x 0.2 kg
	RW-500 500 lb x 0.2 lb/225 kg x 0.1 kg
Dimensions:	30"L x 40"W x 4 1/2"H (76 cm x 102 cm x 11.5 cm)
Platform:	30"L x 30"W x 2 1/2"H (76 cm x 76 cm x 6.4 cm) checkered safety plate
Construction:	Heavy-duty steel with baked-on, powder paint finish
Shipping Weight:	105 lb
204 Indicator	
Display:	5 digit, 7 segment, .1" high LCD
Units Conversion:	Keypad selectable
Enclosure:	General purpose, stainless steel
Power:	Six "C" cell or NiCad batteries, standard 12VDC (115 VAC 60 Hz adapter) or 115 VAC 60 Hz
Output:	RS-232
Zero Tracking:	.0 to 4% selectable ± 6 or 1d selectable 4% max. range
Temperature Range:	14 °F to +104 °F (-10 °C to +40 °C)
205 Indicator	
Display:	6-digit, 7-segment LED, 14mm/0.6" H
Units Conversion:	Lb, lb/oz, oz, kg, g,
Enclosure:	NEMA 4X stainless steel
Power:	90 to 260 VAC, 50 or 60 Hz
Output:	RS-232
Temperature Range:	14 °F to +104 °F (-10 °C to +40 °C)
	• LED annunciators • Auto shutoff mode • Keyboard setup and calibration